
COVERD DULLOCA


**FEUILLE DE REMPLACEMENT (REGLE 26)** 


ŧ



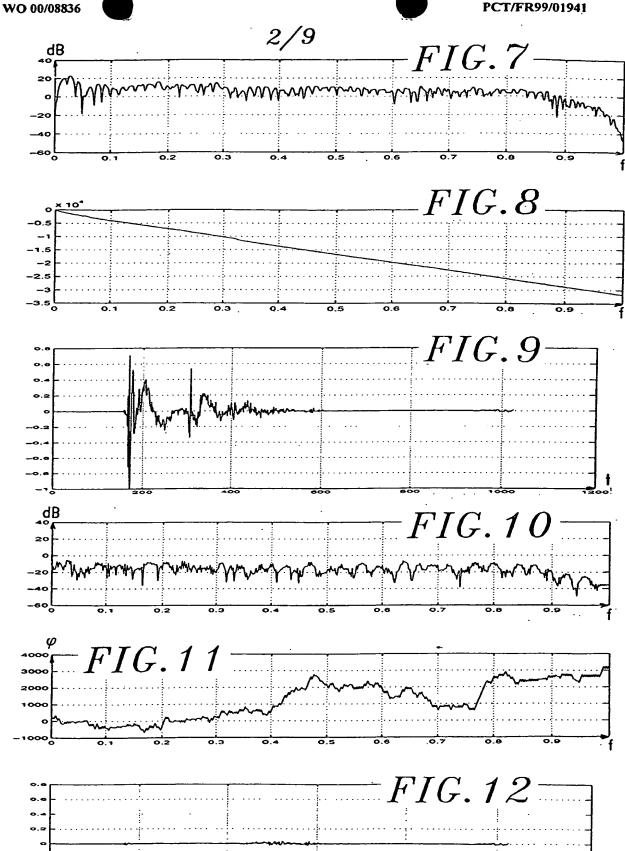

**FEUILLE DE REMPLACEMENT (REGLE 26)** 

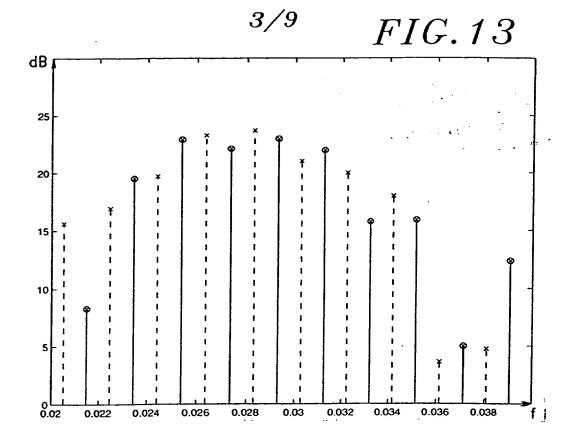

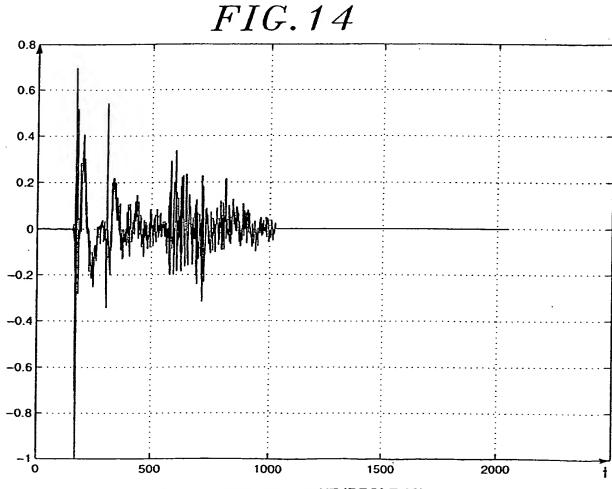



**FEUILLE DE REMPLACEMENT (REGLE 26)** 

PCT/FR99/0194

4/9


FIG. 15

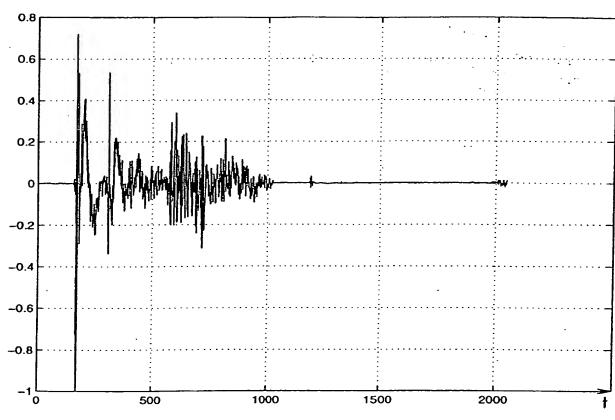

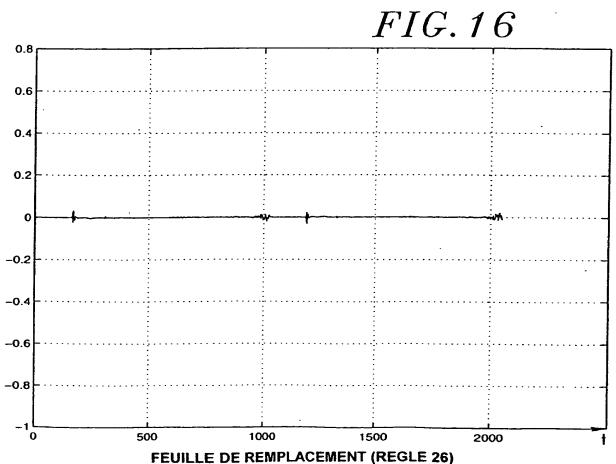


## - , -


## FIG. 17

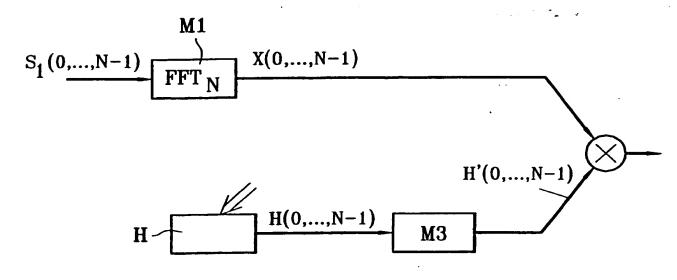



## FIG. 18

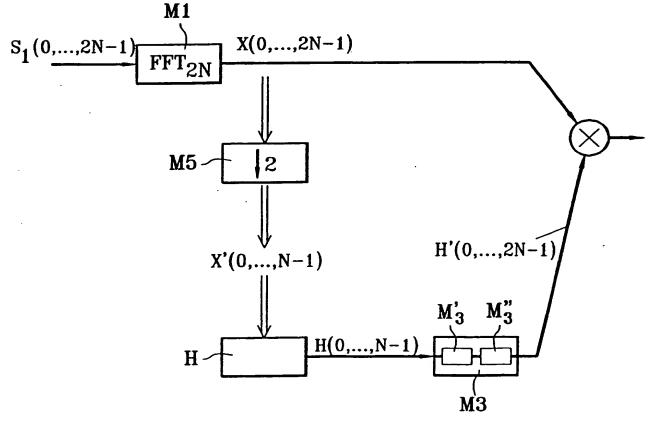



**FEUILLE DE REMPLACEMENT (REGLE 26)** 

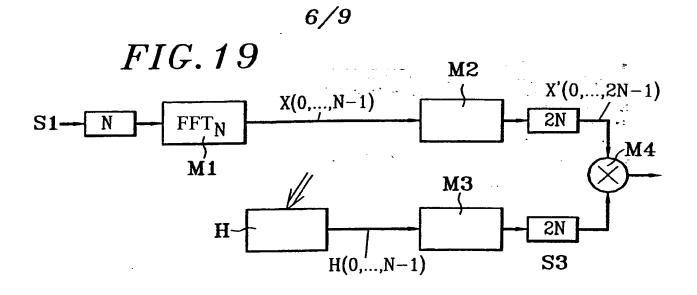

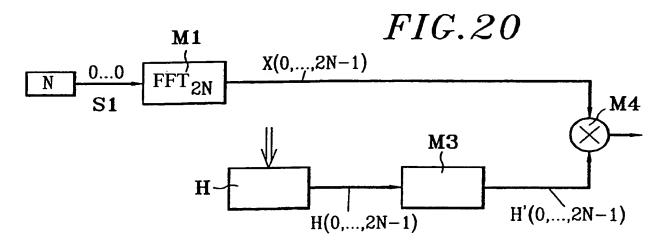

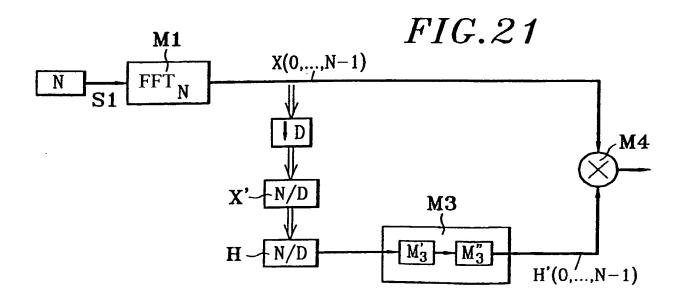

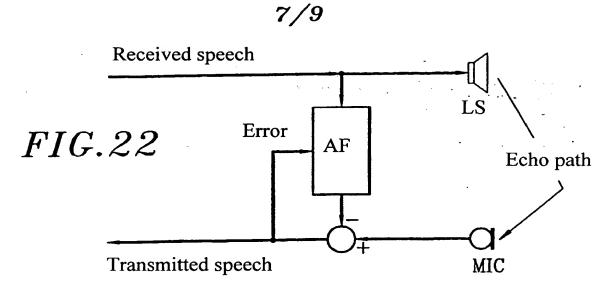

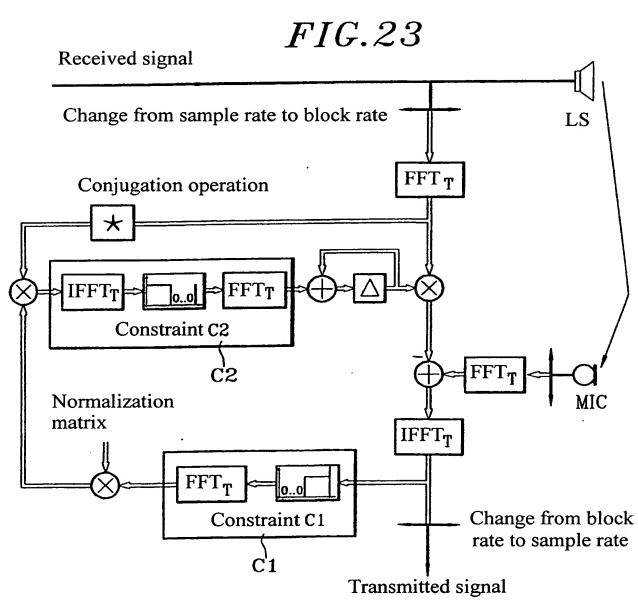

8/9 FIG. 25 100 x(t)LS 50-400 410 FFT T 420 echo 480 noise <u>-cz-</u>468 495 462 465 470 200 300-**450** 460 MС wanted signal FFT,T IFFT<sub>T</sub> 438 440 430 520 <u>500</u> 600 <u>536 - ເລ.</u> 538 532 IFFT<sub>T</sub> -700 530 800

